

3M™ Digital Wall Display

9000PD Plus

For trainers and presenters who need to ensure their message is understood and remembered, the 3M Digital Wall Display Series combines: state of the art projection, digital annotation and mouse control, in a remarkably easy, wall mounted design to maximize communication in the most demanding settings.

The multiple tools integrated into Digital Wall Display make it ideal for capturing and communicating vast and complicated quantities of information.



Order Number: 78-9236-6841-8

Integrated Projector | Erasable Write-On Screen | Powerful Speakers


Display Screen	60" diagonal, easy erase screen surface; 4:3 aspect ratio; 48" W x 36" H
Viewing Angle	170° horizontal, 170° vertical
Optical Structure	Single 0.7" , DLP™ Texas Instruments Incorporated technology, XGA (1024 x 768)
Keystone Adjustment	Optically corrected, electronic for fine adjustments
Throw Ratio	Distance/Diagonal: 755 mm/ 1524 mm = .5
Colors	24 bit full color
Contrast Ratio	300:1 typical; 200:1 minimum
Lamp Type	VIP 250W
Lamp Life	1600 Hours typical
Dimensions	47.6" H x 53.2"W x 7.0"D (1208 mm x 1350 mm x 179 mm)
Wall-to-screen	7.05" (18cm) including mounting bracket
Weight	Approx. 85 lbs. (39 kg.)
Video Compatibility	NTSC, PAL, SECAM, 720P
RGB Compatibility	VGA to SXGA; 640 x 480, 800 x 600, 1024 x 768, 1280 x 1024 (1600 x 1200 DVI-D)
Mouse Emulation	USB
Computer Input	VGA, DVI-I (DVI-D + DVI-A)
Video Input	Component, S-video, Composite
Audio in	2 RCA jacks, 2 x 3.5 mm stereo mini jack
Audio out	RCA jacks loop-through (with delay adjustment)
Serial Control	9 pin D-Sub, RS-232, Ethernet Connector
Audio amp	20 Watts per channel
Speakers	2 x 20w stereo 8 Ω
Power Requirements	Input 100-240 VAC, 50/60 Hz, 3 Wire Grounded, 355 W. max
Environmental	
Operating	10 - 35°C, 10 - 85%RH, without condensation
Storage	-10 - 60°C, 10 - 85%RH, without condensation
Altitude	0 - 6000 feet above sea level
Regulatory	UL, CE, FCC Class A, CISPR Class A
Menu System	On-screen menu system; operable with or without remote
Presentation Tools	Reveal, Blank, Pointer, and Timer
Warranty	One-year limited warranty on parts and labor; 90 day warranty on lamp

INCLUDED ACCESSORIES:

- cables Power Cord Set (US, UK, Euro), VGA Cable (2m), Component (2m), AV RCA cable (3m), S-video cable (2m), 3.5 mm stereo mini cable (2m), RS232 Cable (2m), USB (2m)
- adapters Macintosh™ to VGA Adapter, VGA to DVI
- remote control IR Remote with navigator and mouse emulation, AAA batteries
- mounting bracket Single-position, fixed, hanging mount

Digital Projector Arm:
Present without annoying light projected in your eyes

Speakers:
Full range stereo sound system

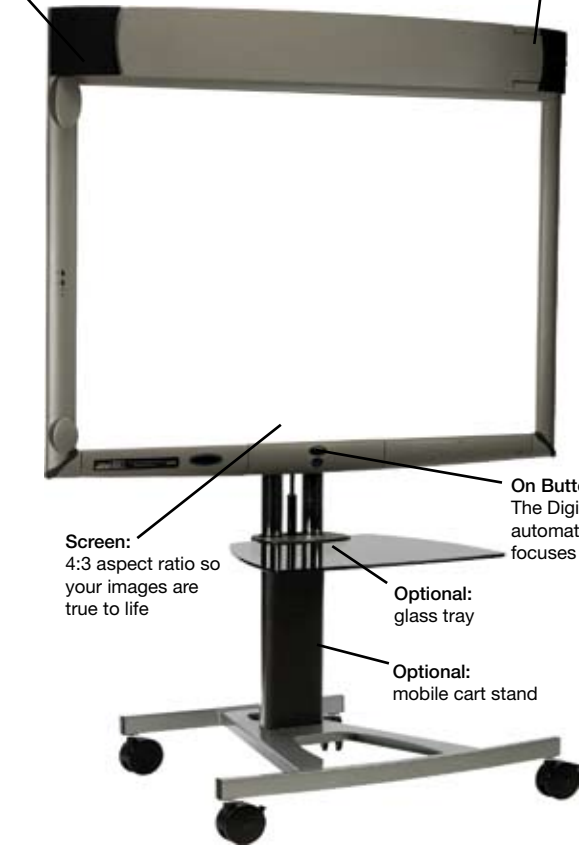

Screen:
4:3 aspect ratio so your images are true to life

On Button:
The Digital Wall Display automatically aligns and focuses the images.

Optional:
glass tray

Optional:
mobile cart stand

OPTIONAL ACCESSORIES:

- adjustable height mobile cart 78-6969-9752-3
- mobile cart glass tray 78-6969-9783-8
- accessory tray (left) 78-6969-9754-9
- accessory tray (right) 78-6969-9753-1
- 1 year Extended Warranty (includes 1 free lamp) 78-6969-3596-4
- installation service 78-9998-3269-0
- spare lamp (9000 series) 78-6969-9736-6



1-800-328-1371

www.3m.com/meetings

Important Notice

All statements, technical information, and recommendations related to 3M's products are on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publication, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability

This product will be free from defects in material and manufacture for a period of one year from the date of purchase. 3M MAKES NO OTHER WARRANTIES or CONDITIONS INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.

Specifications subject to change without notice.

3M is a trademark of 3M Company. Used under license in Canada. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

3M Visual Systems
Building A 147-5N-01
6801 River Place Blvd.
Austin, TX 78726-9000

3M Mexico, S. A. de C. V.
Apartado Postal 14-139
Mexico, D. F. 07070
Mexico

3M Canada
P. O. Box 5757
London, Ontario,
Canada
N6A 4T1

©3M 2006 033006
78-6970-8601-1

