

EIKI


A-key to better communications.

EIP-10V

KEY FEATURES: Model EIP-10V

Self-Contained Multi-Source Projection System: just add your computer.
 Includes XGA Projector, DVD Player, Media Card Player, TV Tuner.
 Weighs about 10.5 lbs! Combines all these devices in one compact package.
 DLP™ projector delivers 1800 ANSI Lumens and a 2200:1 contrast ratio.
 True XGA resolution. SXGA, XGA, SVGA and VGA compatible.
 Quiet operation: operating noise about 32 dBA (typical).
 Smart data compression / expansion, and video scaling.
 Precision optical engine and manual zoom and focus lens.
 Preset image offset. Vertical digital keystone correction. 32x digital zoom.
 Accepts Composite, S, and Component Video (i/p) in all major standards.
 Displays normal 4:3 and Widescreen 16:9 ratio video formats.
 Supports HDTV at 1080i, 1035i & 720p. Supports SD at 480i/p & 575i/p.
 Built-in DVD player with "Intelligent Progressive Scan" for film-like image.
 Media Card Player supports most Movie, Photo and Audio media.
 5.1 Channel Audio Output. Wireless Audio Output (speakers optional).
 Wireless remote controls all included devices. Carry case included.
 3 Year* System Warranty!

XGA DLP™ Series
A TEXAS INSTRUMENTS TECHNOLOGY

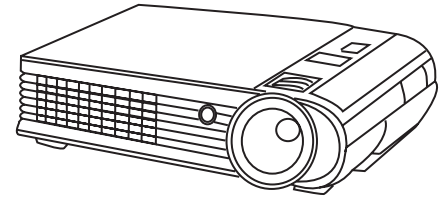

EIP-10V

Included Accessories: Quick Start Guide. Owner's Manual. North America 3-prong grounded and polarized AC Power Cord & 2-prong polarized Adapter with ground wire. European 2-prong AC Power Cord. Lens Cover & Retainer. VGA type Computer Input Cable (HD15 ~ HD15). Mac Adapter. Computer Audio In/Out Cable (Stereo Mini~Stereo Mini). Audio Mono ~ Stereo "Y" Cable (RCA x 1 ~ RCA x 2) Wireless Remote C with 2 AAA batteries. Padded Carry Bag with Shoulder Strap.

Optional Accessories: Replacement Lamp. Wireless Speakers. Carry case for wireless speakers. Ceiling Mount. Ceiling Post and Plate.

SPECIFICATIONS: Model EIP-10V

DATA/VIDEO PROJECTOR

Screen Brightness	1800 ANSI Lumens
Illumination Uniformity	80%
Size of Color Palette	16.7 Million
Contrast Ratio	2200:1 (Full ON/OFF)
Horizontal Resolution	480 TV Lines (S-Video)
Projection Lamp	250 Watt P-VIP
Estimated Lamp Life	2000 Hours Normal, 3500 Hours Eco
Imaging System	0.7" DDR XGA DMD 4 Segment Color Wheel RGWB
Screen Pixels	1024x768 in stripe configuration
Total Pixels	786,432 (1024x768)
Lens Type	Manual Zoom and Focus
Lens Specs	Speed: f:2.8~3.1; FL: .1.02~1.18 in. (25.8~30.0 mm)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 1.8~2.1:1
Image Diagonal	40~300 in. (101.6~762 cm)
Image Width	2.5~20 ft. (0.76~6.1 m.)
Throw Distance	4.8~36.1 ft. (1.46~11 m.)
Front Elevation / Maximum Tilt	up to 15° up / +/- 45°
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) est. 10:0 (100%)
Vertical Keystone Correction	Digital: up to 12° up or down
Scanning Frequency	Auto: H Sync. 15-82 kHz; V Sync. 50-85 Hz
Dot Clock	157.5 MHz
Image Orientation	Normal, Reversed, Inverted
Remote Control	Wireless (Infra Red) x 1
Computer Native Resolution	1024x768 (XGA)
Computer: Compatibility	SXGA, XGA, SVGA, VGA
Computer: Formats	1280x1024, 1024x768, 800x600, 640x480
Computer: Higher Resolutions	Displayed Smart Compressed
Computer: Lower Resolution	Displayed Smart Expanded
Computer Input: Data	Analog - HD15 x 1
Audio	Stereo - MiniStereo x1
Computer Output	(Monitor) HD15 x 1
Video Color Systems	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M & N
Video: Resolutions	480i/p, 576i/p, 720p, 1035i, 1080i
Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Video: Image Sizing	Video Scaling Technology
Video Input: 1. Composite	RCA x 1 (Y)
2. S-Video	S-Video x 1 (Y/C)
3. Component	RCA x 3 (Y, Pb/Cb, Pr/Cr)
Audio	Stereo: RCA x 2 (L&R)

INCLUDED SOURCE DEVICES

DVD Player: Slot-in type. Progressive Scan with 2-3 Pulldown Support.
 Supports DVD, VCD, CD, Interactive VCD, S-VCD, MP3, JPG file
Media Card Player: 3 Bays: CF / SM / MD / MS / SD / MMC media
 Plays Photo (JPG) Movie (MPEG1 & 2) and Music (MP3) files
TV Tuner: "F" Terminal x 1
 NTSC Channels 1 ~ 125

OVERALL SYSTEMS

Internal Audio: Amplifier Mono: 2 Watts
 Speaker 1.5 in. (4.0 cm) x 1
 Audio Output (Wired) Stereo - MiniStereo x 1
 5.1 Channel - MiniStereo x 3
 Operating Noise 32dBA typical
 Cabinet Size** (HxWxD) 3.6 x 14.7 x 11.4 in. (9.1 x 37.4 x 29.0 cm.)
 Weight 10.4 lbs. (4.71kg)
 Packaged Size (H x W x D) 12.0 x 19.5 x 16.0 in. (30.5x 49.5 x 40.6 cm.)
 Packaged Weight 26.5 lb (12kg)
 Power Requirements 100-240V AC, 50/60Hz
 Power Consumption / Heat Normal 330 W /1126 BTU/hr (284 Kcal/hr)
 Power Cord 6' (2M) Type 3, Detachable
 Safety Compliance FCC Class B, cUL Listed
 Security Facilities Kensington® Security Slot
 Operating Temperature 41~95°F (3~35°C)
 User Maintenance Replace Lamp
 Warranty: Projector 3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
 Warranty: Lamp 90 Days (Failed Lamp Replaced Pro-Rata
 * Whichever occurs first

OPTIONAL WIRELESS STEREO SOUND SYSTEM

Built-in Wireless Audio Transmitter Frequency: 2400 MHz band
 Channels: 8; Spacing: 7MHz (min)
 Optional Wireless Amplified Speakers 25W x 2
 Size (each) 10.6 x 6.7 x 7.1 in. (27 x 17 x 18 cm)
 Weight - pair 18.3 lb (8.3 kg)
 Packaged Size (pair) 14 x 19 x 10 in. (35.5 x 48.3 x 25.4 cm)
 Packaged Weight (pair) 21.2lb (9.6 kg)
 Power Requirements: 100-240V AC, 50/60Hz
 Power Consumption: 100W

The Lamp in this projector contains trace elements of mercury. As a public service EIKI publishes the following notice.

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2004 Eiki International, Inc. Issued May 24, 2004.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>